



Roadway Horizontal Alignments I

Course Number: CE-03-908

PDH: 3

Approved for: AK, AL, AR, GA, IA, IL, IN, KS, KY, LA, MD, ME, MI, MN, MO, MS, MT, NC, ND, NE, NH, NJ, NM, NV, OH, OK, OR, PA, SC, SD, TN, TX, UT, VA, VT, WI, WV, and WY

New Jersey Professional Competency Approval #24GP00025600

North Carolina Approved Sponsor #S-0695

Maryland Approved Provider of Continuing Professional Competency

Indiana Continuing Education Provider #CE21800088

This document is the course text. You may review this material at your leisure before or after you purchase the course. In order to obtain credit for this course, complete the following steps:

- 1) Log in to My Account and purchase the course. If you don't have an account, go to New User to create an account.
- 2) After the course has been purchased, review the technical material and then complete the quiz at your convenience.
- 3) A Certificate of Completion is available once you pass the exam (70% or greater). If a passing grade is not obtained, you may take the quiz as many times as necessary until a passing grade is obtained (up to one year from the purchase date).

If you have any questions or technical difficulties, please call (508) 298-4787 or email us at admin@PDH-Pro.com.



INTRODUCTION

The **roadway horizontal alignment** is a series of tangents (straight roadway sections), circular curves, and spiral transitions. It shows the proposed roadway location in relation to the existing terrain and adjacent land conditions. Together with the vertical alignment (grades and vertical curves) and roadway cross-sections (lanes, shoulders, curbs, medians, roadside slopes, ditches, sidewalks), the horizontal alignment (tangents and curves) helps to provide a three-dimensional roadway layout.

This course is the first of two that focuses on the geometric design of **horizontal alignments** for modern roads and highways. Its contents are intended to serve as guidance and not as an absolute standard or rule.

Upon course completion, you should be familiar with the general design of horizontal roadway alignments. The course objective is to give engineers and designers an in-depth look at the principles to be considered when designing roadways.

Subjects covered include:

Design Considerations

Cross slopes

Radii

Grades

Horizontal Curves

Side friction

Radii

Superelevation

Grades

Tangent-Curve Transitions

Runoff lengths

Locations

Spiral Curves


Lengths

Radii

Axis of rotation

A Policy on Geometric Design of Highways and Streets (also known as the “Green Book”) published by the American Association of State Highway and Transportation Officials (AASHTO) is considered to be the primary guidance for U.S. roadway design. For this course, Chapter 3

(Section 3.3 Horizontal Alignment) will be used exclusively for fundamental roadway geometric design principles.

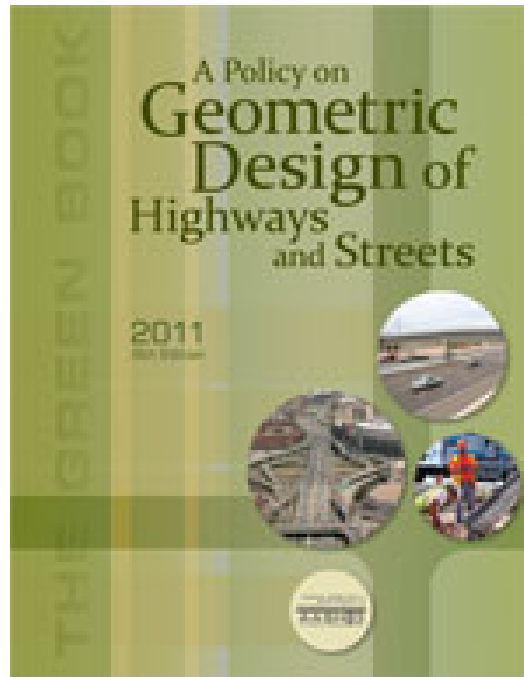

BACKGROUND

Roadway geometric design consists of the following fundamental three-dimensional features:

Vertical alignment - grades and vertical curves

Horizontal alignment - tangents and curves

Cross section - lanes and shoulders, curbs, medians, roadside slopes and ditches, sidewalks

Combined, these elements contribute to the roadway's operational quality and safety by providing a smooth-flowing, crash-free facility.

Engineers must understand how all of the roadway elements contribute to overall safety and operation. Applying design standards and criteria to 'solve' a problem is not enough.

The fundamental objective of good geometric design will remain as it has always been – **to produce a roadway that is safe, efficient, reasonably economic and sensitive to conflicting concerns.**

HORIZONTAL ALIGNMENT

The **horizontal alignment** is a series of horizontal tangents (straight roadway sections), circular curves, and spiral transitions used for the roadway's geometry. This design shows the proposed roadway location in relation to the existing terrain and adjacent land conditions. The main objective of geometric roadway design is to integrate these elements to produce a compatible speed with the road's function and location. Safety, operational quality, and project costs can be significantly influenced by coordinating the horizontal and vertical alignments.

DESIGN SPEED

AASHTO defines design speed as "the maximum safe speed that can be maintained over a specified section of highway when conditions are so favorable that the design features of the highway govern". It is an **overall design control** for horizontal alignments in roadway design that may equal or exceed the legal statutory speed limit. The level of service is directly related to the speed of operation - it should meet driver expectations and be consistent with the facility's functional classification and location.

Design speed selection is a critical decision that should be done at the beginning of the planning and design process. This speed should balance safety, mobility, and efficiency with potential environmental quality, economics, aesthetics, social and political impacts. Roadway design features (curve radii, superelevation, sight distance, etc.) are impacted by the design speed, as well as other characteristics not directly related to speed. Therefore, any changes to design speed may affect many roadway design elements.

Design speeds for **rural roads** should be as high as practicable to supply an optimal degree of safety and operational efficiency. Data has shown that drivers operate quite comfortably at speeds that are higher than typical design speeds.

Lower design speeds may be appropriate for certain **urban roadways** (residential streets, school zones, etc.). Traffic calming techniques have proven to be a viable option for residential traffic operations. Designers should evaluate high speed compatibility with safety (pedestrians, driveways, parking, etc.) for urban arterials.


HORIZONTAL CURVES

Roadway horizontal curve design is based on the laws of physics and driver reaction to lateral acceleration. Any geometric alignment needs to address curve location; curve sharpness; tangent lengths; and how they relate to the vertical profile. All of these components should be balanced to operate at appropriate speeds under normal conditions.

Elements of Curve Design

- Curve radius
- Superelevation
- Side friction
- Assumed vehicle speed

Horizontal curves depend on specific values for a minimum radius (based on speed limit), curve length, and sight obstructions (sight distance). An increased superelevation (bank) may be required to assure safety for high speed locations with small curve radii. Designers must confirm sufficient sight distance around corners or curves in order to avoid crashes.

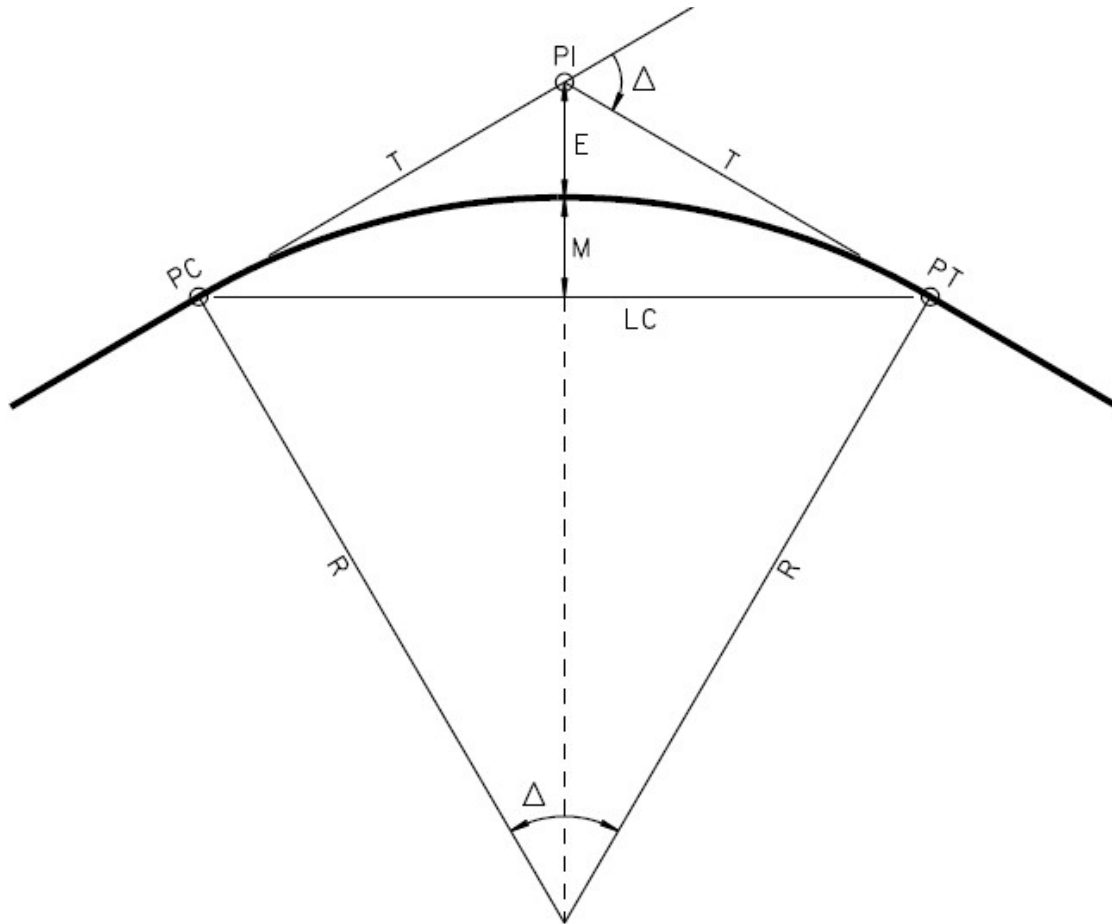

TERMS

R = Radius

PC = Point of Curvature (point at which the curve begins)

PT = Point of Tangency (point at which the curve ends)

PI = Point of Intersection (point at which the two tangents intersect)

T = Tangent Length (distance from PC to PI or PI to PT)

LC = Long Chord Length (straight line between PC and PT)

L = Curve Length (distance from PC to PT measured along the curve)

M = Middle Ordinate (distance from midpoint of LC to midpoint of the curve)

E = External Distance (distance from vertex to curve)

Δ = Deflection Angle (change in direction of two tangents)

The upper limits for superelevation on horizontal curves address constructability, land usage, slow-moving vehicles, and climate. For regular snow or ice locations, the superelevation should not exceed rates where slow-moving vehicles would slide toward the center of the curve.

Hydroplaning can occur at high speed locations with poor drainage that allow a build-up of water.

SIDE FRICTION FACTOR

A vehicle's need for side friction (*side friction demand*) is represented by the **side friction factor**. This term also depicts the lateral acceleration acting on a vehicle which is the product of the side friction demand factor and the gravitational constant. Vehicle speeds on horizontal curves create tire side thrust which is offset by the frictional forces between the tires and the riding surface.

AASHTO's "simplified curve formula" (shown below) is a basic side friction equation that produces slightly higher friction estimates than those resulting from the "basic curve formula".

$$f = \frac{V^2}{15R} - 0.01 e$$

f = side friction factor (demand)

e = rate of roadway superelevation (percent)

V = vehicle speed (mph)

R = radius of curve (feet)

The point of impending skid is the upper side friction factor limit where the tires begin to skid. This depends on vehicle speed, road surface type/condition, and tire condition/type. Historical data has shown a decrease in friction as vehicle speeds increase. Since roadway curves are designed with a margin of safety to prevent skidding, the design friction values should be substantially less than impending skid values.

Maximum side friction factors should be conservative for dry conditions with an ample margin of safety against skidding on wet or icy pavements or vehicle rollover. This shows the need for using skid-resistant surfacing due to roadway friction demands from driving maneuvers (braking, lane changes, directional changes, etc.). Recent studies confirm that side friction factors need to be lower for high-speed designs versus low-speed ones.

Figure 3-6 from AASHTO's "Green Book" shows the recommended side friction factors for horizontal curve design with maximum values ranging from 0.14 (50 mph) to 0.08 (80 mph).

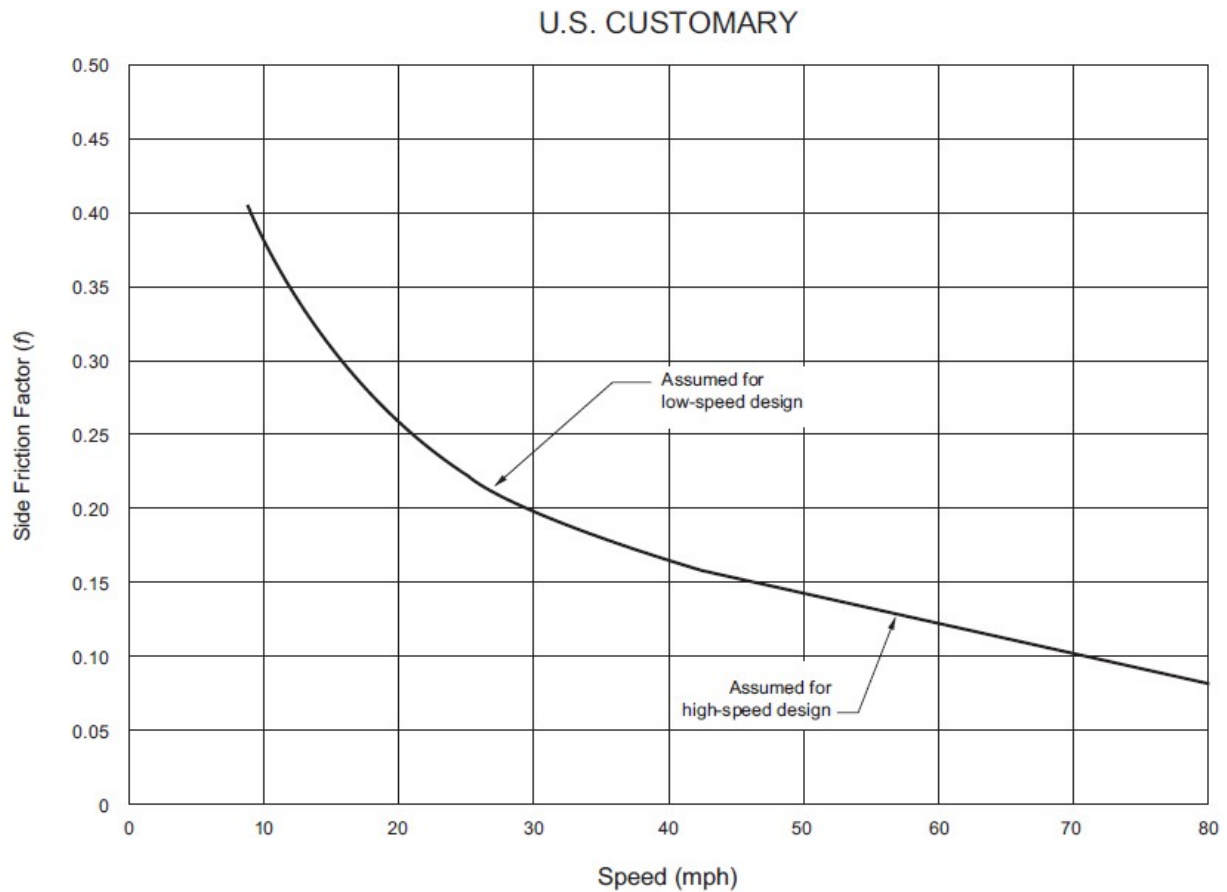


Figure 3-6. Side Friction Factors Assumed for Design

Side Friction Design Factors

	Speed (mph)	Side Friction Factor (f)
Low-Speed Design	10	0.38
	20	0.26
	30	0.20
	40	0.17
High-Speed Design	50	0.14
	60	0.12
	70	0.10
	80	0.08

The level of lateral acceleration that causes drivers to avoid higher speeds is the key to selecting maximum side friction factors.

NORMAL CROSS SLOPE

Roadway drainage determines the minimum rate of cross slope for the traveled way. Acceptable minimum cross slope values range from 1.5 to 2.0 percent (with 2.0 typically used for paved, uncurbed pavements) depending on the roadway type and weather conditions.

MAXIMUM SUPERELEVATION RATES

No single maximum superelevation rate is universally applicable. In order to promote design consistency, a maximum rate is desirable for locations with similar characteristics (land usage, climate, etc.). This uniformity encompasses the roadway's alignment as well as its associated design elements and driver expectations. Consistent designs are associated with lower workloads and crash frequencies.

Controls for Maximum Superelevation

Climate (amount of precipitation)
Terrain (flat, rolling, or mountainous)
Area type (rural or urban)
Slow-moving vehicles (frequency)

Eight percent (8%) is considered to be a reasonable maximum superelevation rate. The highest superelevation rate for highways is typically 10 percent - rates greater than 12% are considered beyond practical limits but may be used in some cases (i.e. low-volume gravel roads for cross drainage).

Recommendations

- Several maximum superelevation rates should be used for design controls for horizontal curves
- Do not exceed a rate of 12 percent
- Rates of 4 or 6 percent may be used for urban areas with few constraints
- Superelevation may be omitted on low-speed urban roads with severe constraints

MINIMUM CURVATURE

The minimum radius for horizontal curves is a limiting value for design speeds based on the maximum superelevation and maximum side friction factor. Actual design values were developed from the laws of mechanics and depend on practical limits and factors that were determined empirically. Sharper radii would require superelevation above the limits for comfortable operation. The minimum radius values maintain a margin of safety against vehicle rollover and skidding.

The “basic curve equation” governs vehicle operation on a horizontal curve.

$$\frac{0.01e + f}{1 - 0.01ef} = \frac{v^2}{gR} = \frac{0.067V^2}{R} = \frac{V^2}{15R}$$

f = side friction factor (demand)

e = rate of roadway superelevation (percent)

v = vehicle speed (feet/second)

g = gravitational constant (32.2 ft/sec²)

V = vehicle speed (mph)

R = radius of curve (feet)

The following equation can be used to calculate the minimum radius of curvature, R_{min} from the “simplified curve formula”.

$$R_{min} = \frac{V^2}{15(0.01 e_{max} + f_{max})}$$

f_{max} = maximum side friction factor (demand)

e_{max} = maximum rate of roadway superelevation (percent)

V = vehicle speed (mph)

R = radius of curve (feet)
Gregory J. Taylor, P.E.

Horizontal curve equations utilize a radius measured to vehicle center of gravity (center of inner travel lane). These equations neglect roadway width or horizontal control location. The difference between the centerline and center of gravity is minor for two-lane roadways – so this curve radius should be measured to the road's centerline.

GRADES

Motorists typically drive faster on downgrades versus upgrades for long or steep roadway grades. Data has shown greater side friction demands on

downgrades – due to braking forces
and **steep upgrades** – from tractive forces.

For grades steeper than 5 percent, adjusting superelevation rates may be considered since this is crucial to roadways with heavy truck volume or intermediate curves with high levels of side friction. This adjustment may be done without reducing the design speed for the upgrade. The proper speed variation depends on specific conditions (grade rate, length, curve radius, etc.) compared to other curves on the roadway's approaches.

Additional superelevation for upgrades on two-lane and multilane undivided roads can counter side friction loss due to tractive forces. This addition on long upgrades may cause negative side friction for slow moving vehicles (heavy trucks, etc.) but may be alleviated by slower speeds, more time for counter steering, and increased driver experience/training.

For rural highways, urban freeways, and high speed urban streets, a balanced design of superelevated, successive horizontal curves is desired to provide a smooth transition with maximum side friction factors varying from 0.14 (50 mph) to 0.08 (80 mph).

On low-speed urban streets, superelevation on horizontal curves may be minimized or eliminated with lateral forces being sustained by side friction only. Various factors that may make superelevation unsuited for low-speed urban areas include:

- Wide pavement areas
- Need to meet adjacent property grades
- Surface drainage
- Low-speed operation concerns
- Intersection frequency

TURNING ROADWAYS

Turning roadways include interchanges (loop or diamond configurations with tangents and curves) and intersections (diamond configurations with compound curves) for right-turning vehicles.

The minimum radii for right-turning vehicles on turning roads must be measured from the inner edge of the traveled way. The radius and superelevation are determined from design speed and other values. Sharper curves with shorter lengths have a reduced opportunity for larger superelevation rates. The desirable turning speed is the average running speed of traffic approaching the turn. Maximum superelevation values should be used on ramps to prevent skidding/overturning, when possible.

Compound curves can be used exclusively for turning roadways with design speeds of 45 mph or less. Higher design speeds make their use impractical due to the large amounts of right-of-way required and should include a mixture of tangents and curves.

TRANSITION DESIGN CONTROLS

A number of factors determine horizontal curve safety, including

curve length radius spiral transitions roadway superelevation.

Since roadway crashes are more probable at curves with small radii or insufficient superelevation, spiral transitions may be used to decrease these mishaps.

Horizontal alignment transition section designs include:

Superelevation transition

- transitions in the roadway cross slope
- consists of superelevation runoff section for outside-lane cross slope changes (flat to full superelevation); and tangent runout section (normal to flat)

Alignment transition

- transitional curves in the horizontal alignment
- spiral or compound curve may be used
- produces gradual change in roadway curvature

When both transition sections are used, these are integrated at the beginning and end of the mainline circular curves. There is no standard accepted empirical basis for determining runoff lengths. Superelevation runoff lengths are mainly governed by appearance.

TANGENT-TO-CURVE TRANSITIONS

“**Tangent-to-curve**” transitions are used for locations where roadway tangents directly adjoin the main circular curve - without using transition curves. **Superelevation runoff** is the length of roadway needed to transition the lane cross slope from flat to full superelevation and conversely. This length should be based on a maximum acceptable difference between the longitudinal grades of the axis of rotation (alignment centerline or pavement reference lines) and the pavement edge. The grade difference (relative gradient) should be limited to a maximum value of 0.50 percent or a longitudinal slope of 1:200 at 50 mph. Greater slopes may be used for design speeds less than 50 mph.

Maximum relative gradients vary with design speed to provide shorter runoff lengths at lower speed and longer lengths at higher speeds. Relative gradient values of 0.78 and 0.35 percent have been shown to provide adequate runoff lengths for 15 and 80 mph.

Table 3-15. Maximum Relative Gradients

Metric			U.S. Customary		
Design Speed (km/h)	Maximum Relative Gradient (%)	Equivalent Maximum Relative Slope	Design Speed (mph)	Maximum Relative Gradient (%)	Equivalent Maximum Relative Slope
20	0.80	1:125	15	0.78	1:128
30	0.75	1:133	20	0.74	1:135
40	0.70	1:143	25	0.70	1:143
50	0.65	1:154	30	0.66	1:152
60	0.60	1:167	35	0.62	1:161
70	0.55	1:182	40	0.58	1:172
80	0.50	1:200	45	0.54	1:185
90	0.47	1:213	50	0.50	1:200
100	0.44	1:227	55	0.47	1:213
110	0.41	1:244	60	0.45	1:222
120	0.38	1:263	65	0.43	1:233
130	0.35	1:286	70	0.40	1:250
			75	0.38	1:263
			80	0.35	1:286

MINIMUM LENGTH OF SUPERELEVATION RUNOFF

The AASHTO equation for determining the minimum length of superelevation runoff is based on design speed, superelevation, and roadway width. This equation can be used for rotation about any pavement reference line containing a rotated width (wn_1) with a common rate of superelevation and rotated as a plane.

$$L_r = \frac{(wn_1)e_d}{\Delta} (b_w)$$

L_r = minimum length of superelevation runoff (feet)

n_1 = number of lanes rotated

e_d = design rate of roadway superelevation (percent)

b_w = adjustment factor for number of lanes rotated






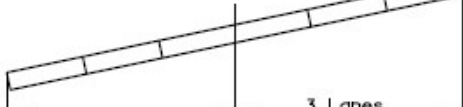
w = width of one traffic lane (feet)

Δ = maximum relative gradient (percent)

Table 3-16. Adjustment Factor for Number of Lanes Rotated

Metric			U.S. Customary		
Number of Lanes Rotated, n_1	Adjustment Factor,* b_w	Length Increase Relative to One-Lane Rotated, (= $n_1 b_w$)	Number of Lanes Rotated, n_1	Adjustment Factor,* b_w	Length Increase Relative to One-Lane Rotated, (= $n_1 b_w$)
1	1.00	1.0	1	1.00	1.0
1.5	0.83	1.25	1.5	0.83	1.25
2	0.75	1.5	2	0.75	1.5
2.5	0.70	1.75	2.5	0.70	1.75
3	0.67	2.0	3	0.67	2.0
3.5	0.64	2.25	3.5	0.64	2.25

Source: AASHTO "Green Book" Table 3-16

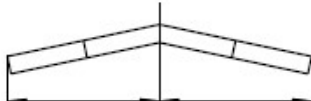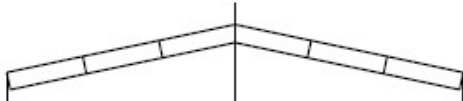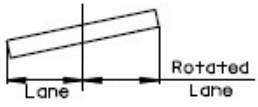ONE LANE	TWO LANE	THREE LANE
 Normal Section	 Normal Section	 Normal Section
 Rotated Section	 Rotated Section	 Rotated Section

Source: AASHTO "Green Book" Table 3-16

Tangent Runout Length Factors

- Amount of adverse cross slope to be removed
- Rate of removal

The removal rate needs to equal the relative gradient that defined the superelevation runoff length in order to produce a smooth edge of pavement profile.

$$L_t = \frac{e_{NC}}{e_d} L_r$$

L_t = minimum length of tangent runoff (feet)

e_{NC} = normal cross slope rate (percent)

e_d = design rate of roadway superelevation (percent)

L_r = minimum length of superelevation runoff (feet)

LOCATION WITH RESPECT TO END OF CURVE

Locating a curve's superelevation runoff with respect to its Point of Curvature (PC) is an important ingredient for tangent-to-curve design. The preferable method uses a portion on the tangent since it minimizes peak lateral acceleration and side friction demand, plus it is consistent with the natural spiral path during curve entry. A typical superelevation runoff length is divided between the tangent and curve sections (avoiding placement of the entire length in either section). The tangent proportion normally varies from 60 to 80 percent – with most entities using 67 percent. Theoretical factors indicate that tangent runoff length values of 70 to 90 percent produce the best operating conditions with the specific value depending on design speed and rotated width.

Table 3-18. Runoff Locations that Minimize the Vehicle's Lateral Motion

Metric					U.S. Customary				
Design Speed (km/h)	Portion of Runoff Located prior to the Curve				Design Speed (mph)	Portion of Runoff Located prior to the Curve			
	Number of Lanes Rotated					Number of Lanes Rotated			
	1.0	1.5	2.0–2.5	3.0–3.5		1.0	1.5	2.0–2.5	3.0–3.5
20–70	0.80	0.85	0.90	0.90	15–45	0.80	0.85	0.90	0.90
80–130	0.70	0.75	0.80	0.85	50–80	0.70	0.75	0.80	0.85

Source: AASHTO "Green Book" Table 3-18

SPIRAL CURVES

The average driver can follow a suitable transition path when entering or exiting a circular horizontal curve and stay within normal lane limits. At locations with high speeds and sharp curvature, the use of transition curves between the tangents and the curves may make it easier for the vehicle to stay within its own lane.

Spiral curves are typically incorporated into horizontal alignments to transition from normal tangent sections to full superelevation. Spiral radii decrease uniformly from infinity (at the tangent) to that of the adjoining curve. By being more complex, spirals provide excellent operational capabilities – especially for high speed alignments.

Uses of Spiral Transition Curves

- Tangent with a circular curve
- Tangent with a tangent (double spiral)
- Circular curve with a circular curve
and compound or reverse curves

Advantages of Transition Curves

Natural easy-to-follow driving

- *Lateral force increases and decreases gradually*
- *Minimizes adjoining lane encroachment*
- *Promotes uniform speeds*

Suitable location for superelevation runoff


- *Fits speed-radius relationship for vehicles*

Facilitates traveled way width transition

- *Provides flexibility for width transitions on sharp circular curves*

Enhances roadway appearance

- *Avoids perceived breaks in the horizontal alignment*

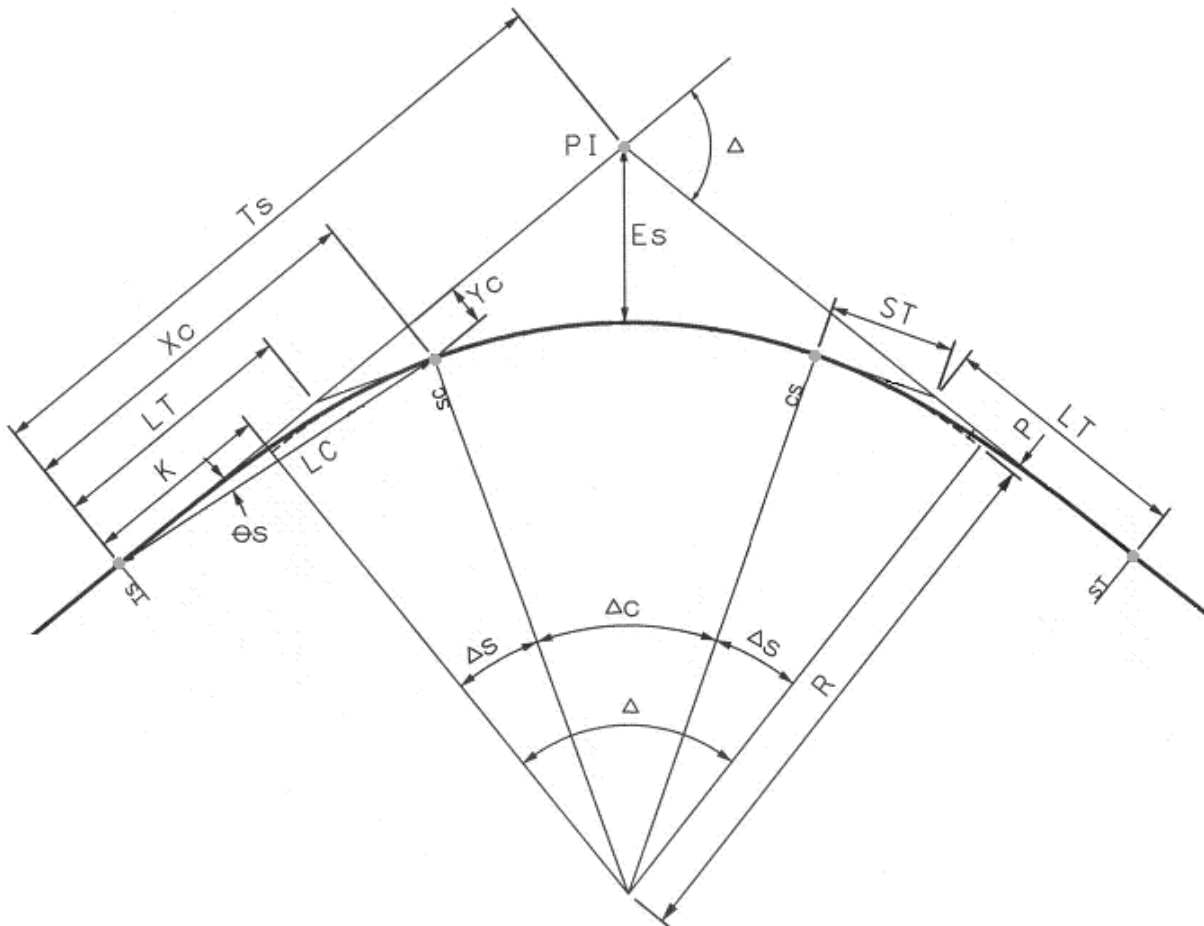

LENGTH OF SPIRAL

In 1909, W.H. Short developed an equation using lateral acceleration on railroad curves. This basic equation is used by some agencies for calculating the minimum length of a spiral curve. The minimum length of a spiral curve may be determined from the following AASHTO formula.

$$L = \frac{3.15V^3}{RC}$$

L = minimum length of spiral (feet)

C = rate of increase of lateral acceleration (ft/sec³)

V = vehicle speed (mph)

R = radius of curve (feet)

The C-factor represents comfort and safety levels and normally ranges from 1 to 3 ft/sec³ for highways. Equations modified for superelevation produce shorter spiral curve lengths. AASHTO states that a more realistic method is to set the spiral length equal to the superelevation runoff.

MAXIMUM SPIRAL RADIUS

Present guidance regarding spiral curves indicates that an upper radius limit can be used – with radii below this value having safety and operational benefits from using spirals. Minimum lateral acceleration rates of 1.3 to 4.25 ft/s² have been used to establish limiting radii. The higher rates correspond to the maximum radius with a reduction in crash potential. AASHTO recommends that the maximum spiral radius should be based on a minimum lateral acceleration rate of 4.25 ft/s². This produces a range of values (Table 3-20) such as:

<u>Design Speed</u>	<u>Maximum Radius</u>
15 mph	114 feet
to	to
80 mph	3238 feet

MINIMUM SPIRAL LENGTH

Spiral curve length is a crucial design control for horizontal alignments. *Driver comfort* and *lateral vehicle shift* are the major considerations used to define the minimum length of spiral curve. Criteria that address driver comfort help produce an easy increase in lateral acceleration upon spiral curve entry. Considerations for lateral shifting are meant to create a spiral that can handle a shift in vehicle lateral position within the travel lane that is consistent with its natural spiral path. AASHTO Equations 3-26 and 3-27 illustrate these relationships.

$L_{s,min}$ should be the larger value of

$$L_{s,min} = \sqrt{24(p_{min})R}$$

or

$$L_{s,min} = \frac{3.15V^3}{RC}$$

$L_{s,min}$ = minimum length of spiral (feet)

C = maximum rate of change in lateral acceleration (4 ft/sec²)

V = vehicle speed (mph)

R = radius of curve (feet)

p_{min} = minimum lateral offset between the tangent and circular curve (0.66 ft)

The standard value for p_{min} is typical for natural steering behavior. Using lower values for C and p_{min} will create longer, easier spiral lengths that will not exhibit the minimum lengths associated with driver comfort.

MAXIMUM LENGTH OF SPIRAL

A conservative maximum length of spiral transition curve needs to be determined in order to prevent violating driver expectations about the sharpness of upcoming curves. AASHTO Equation 3-28 produces appropriate values for maximum spiral lengths with the following formula:

$$L_{s,max} = \sqrt{24(p_{max})}R$$

$L_{s,max}$ = maximum length of spiral (feet)

R = radius of circular curve (feet)

p_{max} = maximum lateral offset between the tangent and circular curve (3.3 feet)

The recommended p_{max} value of 3.3 feet is consistent with the maximum lateral shift plus it balances spiral length and curve radius values.

DESIRABLE LENGTH OF SPIRAL

Research has proven that optimal conditions occur when spiral curve lengths are equal to the natural spiral path lengths of vehicles. Length differences produced operational problems

involving large lateral velocities or shifts at the end of the transition. AASHTO Table 3-21 provides a table of desirable lengths of spiral that correspond to 2.0 seconds of travel time (for natural spiral paths). If the desirable spiral value is less than the calculated minimum spiral curve length – use the minimum length for design.

<u>Design Speed</u>	<u>Spiral Length</u>
15 mph	44 feet
to	to
80 mph	235 feet

LENGTH OF SUPERELEVATION RUNOFF

While it is recommended that superelevation runoffs occur over the spiral length, calculated runoff lengths and lengths of spiral are not significantly different. Lengths of superelevation runoff apply to superelevated curves and are recommended when determining minimum spiral lengths – the spiral length should be set equal to the runoff length. By transitioning the superelevation over the spiral length, full superelevation is contained within the whole circular curve. However, a result of equating the runoff and spiral lengths is a resulting relative gradient that exceeds AASHTO's maximum relative gradients.

LENGTH OF TANGENT RUNOFF

Tangent runout lengths for spirals are akin to the designs for tangent-to-curve transitions. The preferred design contains a smooth pavement edge profile with a common edge slope gradient throughout the superelevation runout and runoff sections. AASHTO Equation 3-29 presents a computation method for tangent runout lengths. The "Green Book" also provides a table (Table 3-23) for tangent runout lengths.

$$L_t = \frac{e_{NC}}{e_d} L_S$$

L_t = length of tangent runoff (feet)

e_{NC} = normal cross slope rate (percent)

e_d = design rate of roadway superelevation (percent)

L_S = length of spiral curve (feet)

LOCATION WITH RESPECT TO END OF CURVE

The superelevation runoff is accomplished over the whole spiral transition and should be equal for both the tangent-to-spiral (TS) and spiral-to-curve (SC) transitions. The spiral curve and superelevation runoff are equivalent with the roadway rotated to full superelevation at the SC, and reversed when leaving the curve. The whole circular curve contains the full superelevation.

METHODS OF ATTAINING SUPERELEVATION

*Revolving traveled way with normal cross slopes about **centerline** profile*

Most widely used method due to its reduced distortion involving a change in elevation of the edge of the traveled way. One-half of the elevation change is made at each edge.

*Revolving traveled way with normal cross slopes about **inside-edge** profile*

The inside-edge profile is parallel to the profile reference line. The actual centerline profile is raised with respect to the inside-edge profile to create one-half of the elevation change. The other half is made by raising the outside edge profile an equal amount (with respect to actual centerline).


*Revolving traveled way with normal cross slopes about **outside-edge** profile*

Similar to inside-edge method except the elevation change occurs below the outside-edge profile.

*Revolving traveled way with **straight** cross slopes about outside-edge profile*


Often used for two-lane one-way roads where the axis of rotation coincides with the edge of traveled way adjacent to the median.

The centerline profile's shape and direction can influence the method for attaining superelevation. Each transition section should be evaluated individually to produce the most pleasing and functional results. The following figures illustrate these different superelevation methods for a curve veering to the right.

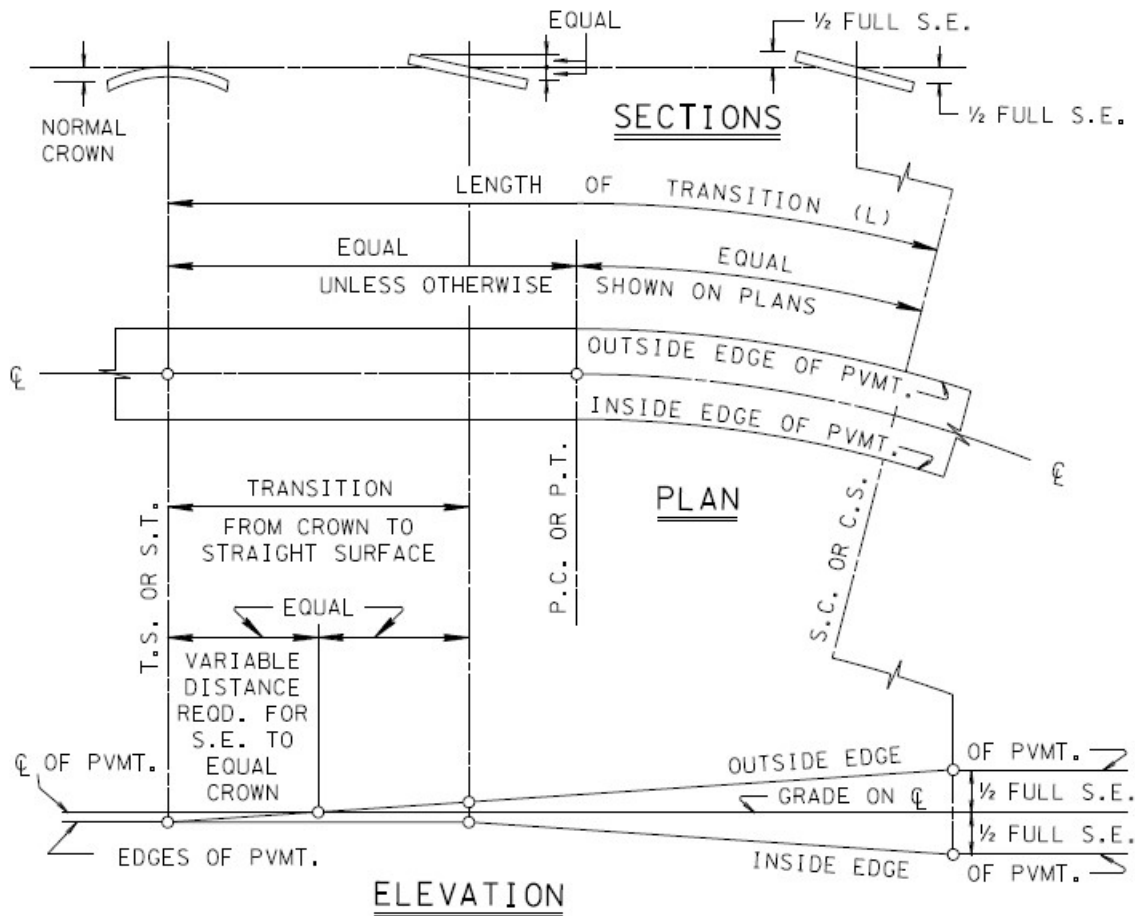

TYPICAL TRANSITION IN SUPERELEVATION 2-LANE HIGHWAY

Source: TDOT Std. Rdwy. Dwg. RD01-SE-2

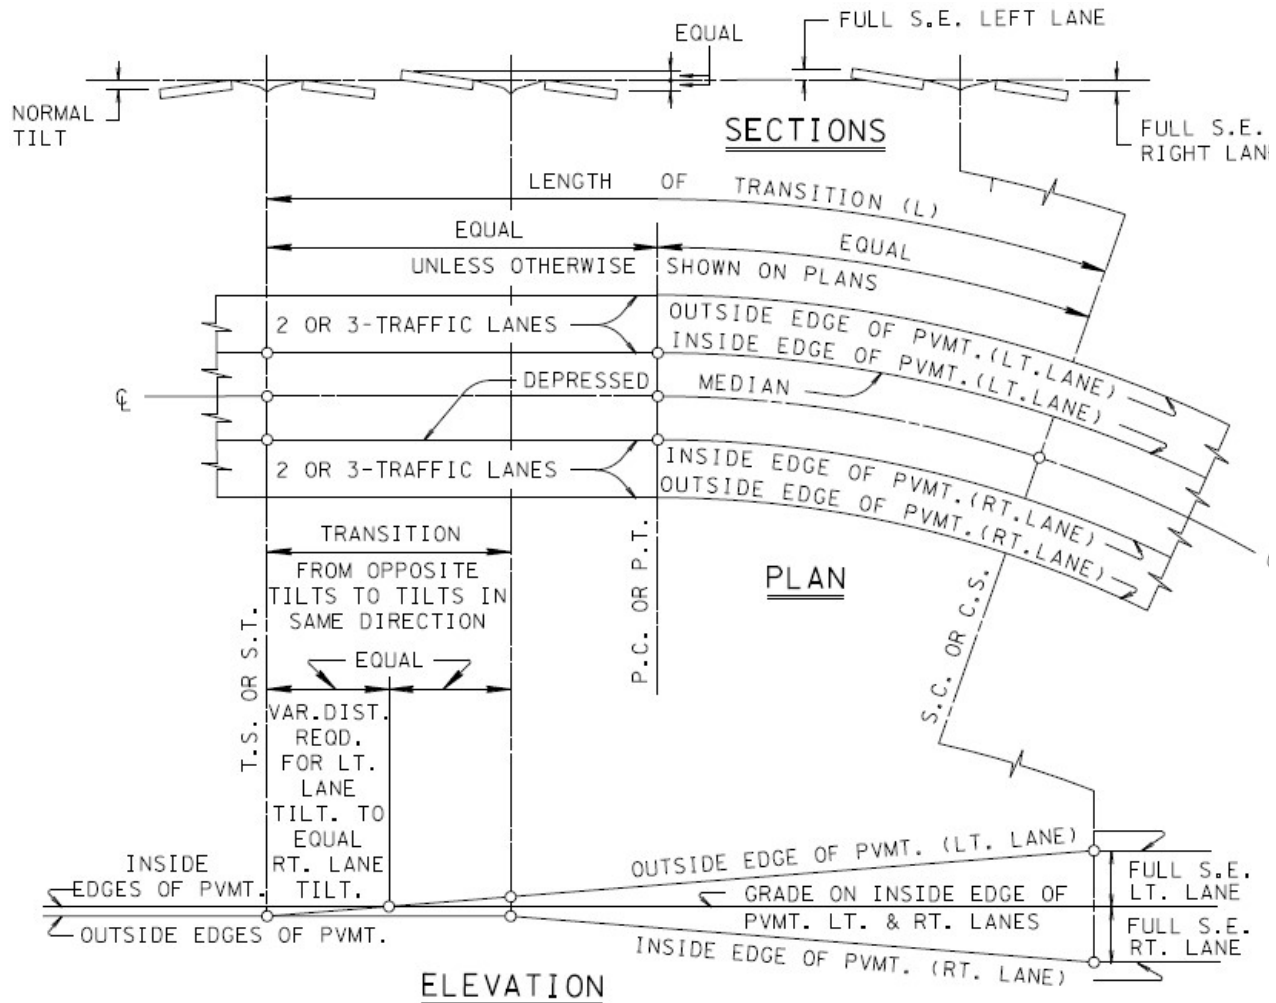

TYPICAL TRANSITION IN SUPERELEVATION 4 OR 6-LANE HIGHWAY WITH DEPRESSED MEDIAN

Source: TDOT Std. Rdwy. Dwg. RD01-SE-2

DESIGN OF SMOOTH PROFILES FOR TRAVELED-WAY EDGES

Vertical curves should be used to smoothe out any angular breaks at cross sections caused by the tangent profile control lines. Presently, there are no specific guidelines for vertical curve lengths in diagrammatic profiles but the minimum vertical curve length can be approximated using 0.2 times the design speed (greater lengths can be used where practical).

Another method uses graphical techniques (spline-line development) to define the edge profile. The profile is first plotted on a vertical scale with superelevation control points. Next, curves or templates are used to approximate straight-line controls. After smoothing is completed,

elevations can then be read properly. This method offers infinite alternatives with minimal labor.

Divided roadways need greater emphasis in their design and appearance due to their heavier traffic volumes. Therefore, the use of smooth profiles for divided highway traveled-way edges is warranted more than those for two-lane roads.

AXIS OF ROTATION WITH A MEDIAN

The addition of a roadway median impacts superelevation transition designs due to the location for the axis of rotation. These locations are dependent on median width and cross-section which are described in the following common combinations:

Case I - *Traveled way (with median) superelevated as a plane section*

Limited to narrow medians and moderate superelevation to avoid major elevation differences (edges of traveled way)

Median width: 15 feet or less

Length of runoff is based on total rotated width (including median)

Median widths 10 feet or less may be deleted from runoff length since narrow medians have little effect

Case II - *Median as a horizontal plane with the two traveled ways rotated separately about median edges*

Suitable median widths: 15 to 60 feet

Usually used for roadways rotated about median-edge of pavement

Medians widths 10 feet or less may have runoff lengths the same as single undivided roads

Case III - *Two traveled ways treated separate for runoff*

Produces variable difference in median edge elevations

Wide median widths: 60 feet or more

Profiles and superelevation transition designed separately for two roadways

MINIMUM TRANSITION GRADES

There are two types of drainage problems for pavement surfaces in superelevation transition sections.

- 1) Potential lack of adequate longitudinal grade
 Grade axis of rotation is equal (but opposite sign) to effective relative gradient
 Results in pavement edge with negligible longitudinal grade and poor surface drainage
- 2) Inadequate lateral drainage
 Due to negligible cross slope during pavement rotation
 Length of transition includes tangent runout and equal runoff sections that may not drain pavement laterally

Potential drainage problems may be alleviated using the following techniques:

- Maintaining a minimum vertical grade of 0.5% through the transition
- Maintaining minimum edge-of-pavement grades of 0.2% (0.5% curbed streets) through the transition

TURNING ROADWAY CURVES

Drivers naturally follow transitional travel paths when turning at interchange ramps and intersections (or on open roadways). Facilities not following natural transition paths may result in drivers deviating from the intended path and encroaching on other traffic lanes. The best ways to accommodate natural travel paths is by using transition curves - either between two circular arcs, or between a tangent and circular curve.

Spiral lengths for intersection curves are determined using the same method as for open roadways. Intersection curve lengths may be less than highway curves since motorists accept quicker changes in travel direction at intersections.

The minimum spiral lengths for minimum-radius curves are determined by design speed. AASHTO Table 3-24 shows values ranging from:

<u>Design Speed</u>	<u>Design Minimum Speed Length</u>
20 mph	70 feet
to	to
45 mph	200 feet

COMPOUND CIRCULAR CURVES

Compound circular curves can be used to produce effective turning roadway geometries for intersection and interchanges. For locations where circular arcs with different radii are connected, the following ratios are generally acceptable:

Compound Curve Location	Flatter Radius to Sharper Radius Ratio
Open highways	1.5:1
Intersections/Turning roadways	2:1 (satisfactory operation & appearance)

Smaller curve radii differential is preferred where practical – with a desirable maximum value of 1.75:1. If the ratio is greater than 2:1, a suitable intermediate spiral/arc should be used between the two curves. Do not use this ratio control for very sharp curves designed for minimum vehicle turning paths. Higher ratios may be needed for compound curves that closely fit the design vehicle path. Each curve length should be adequate for reasonable driver deceleration.

AASHTO Table 3-25 provides circular arc lengths for compound intersection curves. These values assumed a deceleration rate of 3 mph/s with a desirable minimum deceleration of 2 mph/s (very light braking).

OFFTRACKING

Offtracking occurs when a vehicle's rear wheels do not follow the exact path as its front wheels when negotiating a horizontal curve or turn. This is dependent on curve/turning radii, articulation points, and vehicle wheelbase lengths.

<u>Situation</u>	<u>Result</u>
Curve without superelevation (low speed)	Rear wheels track inside front wheels
Superelevated curve	Rear wheels may track inside front wheels (more or less)
High speeds	Rear wheels may track outside front wheels

Offtracking is more pronounced for larger design vehicles and emphasizes the amount of widening needed on horizontal curves. This widening increases with the size of the design vehicle and decreases with increasing curve radii.

The amount of widening on horizontal curves for offtracking depends on curve radius design vehicle characteristics:

Width of inner lane vehicle front overhang
Rear overhang width
Track width for passing
Lateral vehicle clearance
Curve difficulty allowance width

SUMMARY

Along with the roadway cross section (lanes and shoulders, curbs, medians, roadside slopes and ditches, sidewalks) and vertical alignment (grades and vertical curves), the **horizontal alignment** (tangents and curves) helps provide a three-dimensional roadway model. Its ultimate goal is to provide a safe, smooth-flowing facility that is crash-free. Roadway horizontal alignments are directly related to their operational quality and safety.

In today's environment, designers must do more than apply design standards and criteria to 'solve' a problem. They must understand how various roadway elements contribute to safety and facility operation, including the horizontal alignment.

This course is the first of two that summarizes the geometric design of horizontal alignments for modern roads and highways. This document is intended to serve as guidance and not as an absolute standard or rule. For further information, please refer to **AASHTO's A Policy on Geometric Design of Highways and Streets (Green Book)**. It is considered to be the primary guidance for U.S. roadway design. **Section 3.3 – Horizontal Alignment** was used exclusively to present fundamental horizontal roadway geometric design principles.

By completing this course, you should be familiar with the general design of horizontal roadway alignments. The objective of this course was to give engineers and designers an in-depth look at the principles to be considered when selecting and designing roads.

This course focused on the following:

- Design Considerations
 - Cross slopes*
 - Radii*
 - Grades*
- Horizontal Curves
 - Side friction*
 - Radii*
 - Superelevation*
 - Grades*

- Tangent-Curve Transitions
 - Runoff lengths*
 - Locations*
- Spiral Curves
 - Lengths*
 - Radii*
 - Axis of rotation*
- Offtracking

The fundamental objective of good geometric design will remain as it has always been – **to produce a roadway that is safe, efficient, reasonably economic and sensitive to conflicting concerns.**

REFERENCES

A Policy on Geometric Design of Highways and Streets, 6th Edition

AASHTO. Washington, D.C. 2011.

Note: This text is the source for all equations, figures, and tables contained within this course, unless noted otherwise.

Elementary Surveying, 6th Edition

Russell C. Brinker & Paul R. Wolf. Harper & Row. New York. 1977.

Handbook of Simplified Practice for Traffic Studies

Center for Transportation Research & Education – Iowa State. Ames, Iowa. 2002.

Low-Cost Treatments for Horizontal Curve Safety

Federal Highway Administration Office of Safety. Washington, D.C. 2006.

Manual on Uniform Traffic Control Devices (MUTCD)

Federal Highway Administration. Washington, D.C. 2009.

Standard Roadway Drawings

Tennessee Department of Transportation.

Traffic Engineering Handbook, 5th Edition

Institute of Transportation Engineers. Washington, D.C. 1999.